











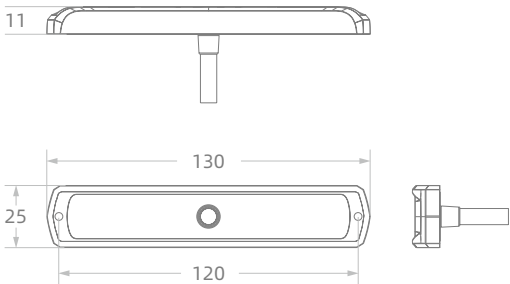


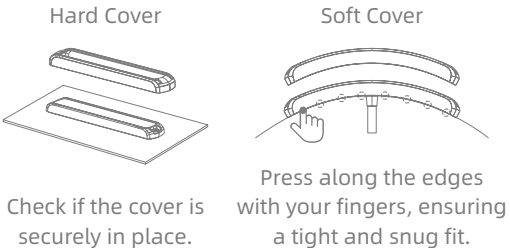







FEATURES

- Lens made of transparent silicone material, base made of thermally conductive silicone material, lifetime warranty
- Configured with two types of COVER, ABS+PC hard and silicone soft materials
- Can be bent back up to 30° for installation on curved surfaces
- 3M tape installation and M3 screw installation, mounting hole spacing 120mm
- ECE R10, ECE R65, SAE J595, CA T13



Install Cover



Code	TF-6 Warning and Working Light																
Item	024525		024526				024521			024522							
Voltage	10-33V						10-16V										
Color																	
Max Power	9W						10W										
LED	6PCS		12PCS				12PCS			24PCS							
Flash Pattern	14																
LENS	TIR																
Functoon	Warning Light		Warning and Working Light														
IP Rating	IP67+IP69K																
Operating Temperature	-30° C to +70° C																
Certifications	ECE R10, ECE R65 XB2/XA2/XR2, SAE J595 class1, CA T13																
Mounting	Screw Mount / 3M Tape Installation																
Warranty	Lifetime Warranty																

TF SERIES ITEM SPECIFICATION

0245

21

TBR

Configuration

25, 26: 10-33V  
21, 22: 10-16V

LED Color

Single: B, R, A, W  
Dual: TBR, TAB, TBW, TAR, TRW, TAW  
Four: TBRAW

A: Amber  
R: Red  
B: Blue  
W: White

